


## Фотометрические характеристики профильного прожектора D'Artagnan 930 SNX (2500W)



Тип лампы MSR 2500W HR (Philips)  
Горячий повторный поджиг  
Цоколь G38

### • Optics @ 10°




10°

Field angle  
3%

Beam intensity  
1 668 000 cd

Distance	20 m	30 m	40 m	50 m	60 m	70 m
Diameter	3.5 m	5.2 m	7 m	8.7 m	10.5 m	12.2 m
Illumination	4 200 lux	1 900 lux	1 050 lux	670 lux	470 lux	350 lux
Distance	65 ft	100 ft	130 ft	165 ft	195 ft	230 ft
Diameter	11.4 ft	17.5 ft	22.7 ft	28.9 ft	34.1 ft	40.2 ft
Illumination	400 fc	170 fc	100 fc	65 fc	44 fc	32 fc

### • Optics @ 25°



25°

Field angle  
3%

Beam intensity  
194 000 cd



Distance	20 m	30 m	40 m	50 m	60 m	70 m
Diameter	8.9 m	13.3 m	17.7 m	22.2 m	26.6 m	31 m
Illumination	490 lux	220 lux	130 lux	80 lux	55 lux	40 lux
Distance	65 ft	100 ft	130 ft	165 ft	195 ft	230 ft
Diameter	28.8 ft	44.3 ft	57.6 ft	73.2 ft	86.5 ft	102 ft
Illumination	46 fc	20 fc	12 fc	8 fc	6 fc	4 fc

## Фотометрические характеристики профильного прожектора D'Artagnan 933 SNX (2500W)



Тип лампы MSR 2500W HR (Philips)  
Горячий повторный поджиг  
Цоколь G38



### • Optics @ 29°

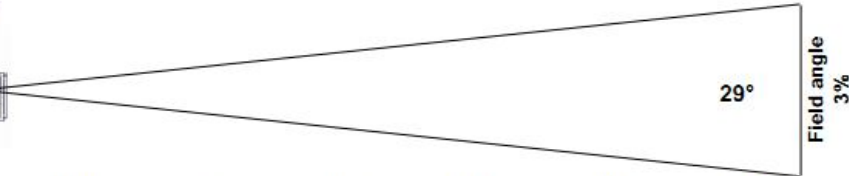

**Beam intensity**  
213 000 cd

<b>Distance</b>	10 m	15 m	20 m	25 m	30 m	35 m
<b>Diameter</b>	5.2 m	7.8 m	10.3 m	12.9 m	15.5 m	18.1 m
<b>Illumination</b>	2 150 lux	950 lux	540 lux	350 lux	240 lux	180 lux
<b>Distance</b>	35 ft	50 ft	65 ft	80 ft	100 ft	115 ft
<b>Diameter</b>	18.1 ft	25.9 ft	33.6 ft	41.4 ft	51.7 ft	59.5 ft
<b>Illumination</b>	180 fc	90 fc	55 fc	34 fc	22 fc	17 fc

### • Optics @ 50°

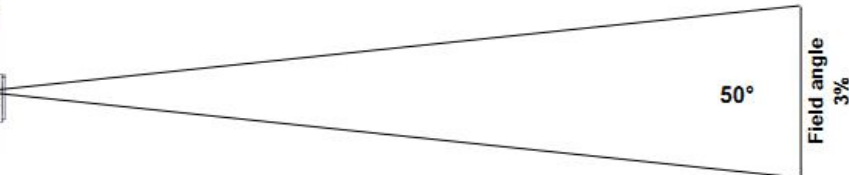

**Beam intensity**  
61 500 cd


<b>Distance</b>	10 m	15 m	20 m	25 m	30 m	35 m
<b>Diameter</b>	9.3 m	14 m	18.7 m	23.3 m	28 m	32.6 m
<b>Illumination</b>	620 lux	280 lux	160 lux	100 lux	70 lux	55 lux
<b>Distance</b>	35 ft	50 ft	65 ft	80 ft	100 ft	115 ft
<b>Diameter</b>	32.6 ft	46.6 ft	60.6 ft	74.6 ft	93.3 ft	107.3 ft
<b>Illumination</b>	55 fc	25 fc	15 fc	10 fc	7 fc	5 fc

## Фотометрические характеристики профильного прожектора D'Artagnan 934 SNX (2500W)



Тип лампы MSR 2500W HR (Philips)  
Горячий повторный поджиг  
Цоколь G38


### • Optics @ 16°

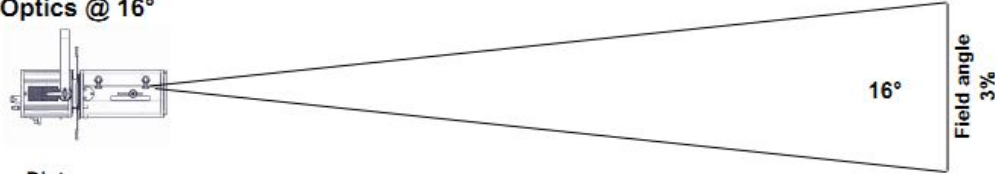

**Beam intensity**  
450 000 cd

<b>Distance</b>	15 m	20 m	25 m	30 m	35 m	40 m
<b>Diameter</b>	4.2 m	5.6 m	7 m	8.4 m	9.8 m	11.2 m
<b>Illumination</b>	2 050 lux	1 150 lux	730 lux	510 lux	370 lux	290 lux
<b>Distance</b>	50 ft	65 ft	80 ft	100 ft	115 ft	130 ft
<b>Diameter</b>	14.1 ft	18.3 ft	22.5 ft	28.1 ft	32.3 ft	36.5 ft
<b>Illumination</b>	190 fc	110 fc	75 fc	46 fc	35 fc	27 fc

### • Optics @ 38°

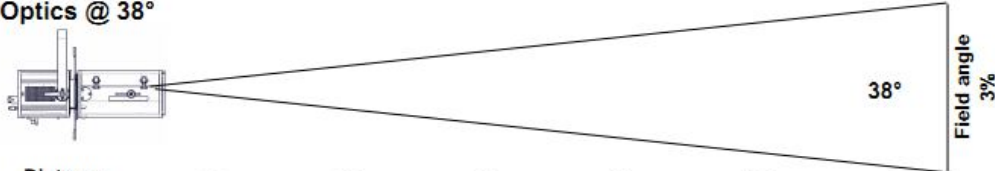

**Beam intensity**  
99 000 cd

<b>Distance</b>	15 m	20 m	25 m	30 m	35 m	40 m
<b>Diameter</b>	10.3 m	13.8 m	17.2 m	20.7 m	24.1 m	27.5 m
<b>Illumination</b>	450 lux	250 lux	160 lux	120 lux	85 lux	65 lux
<b>Distance</b>	50 ft	65 ft	80 ft	100 ft	115 ft	130 ft
<b>Diameter</b>	34.4 ft	44.8 ft	55.1 ft	68.9 ft	79.2 ft	89.5 ft
<b>Illumination</b>	40 fc	24 fc	16 fc	10 fc	8 fc	6 fc